


Isowasher flat rubber metal anti vibration washers with spigot.

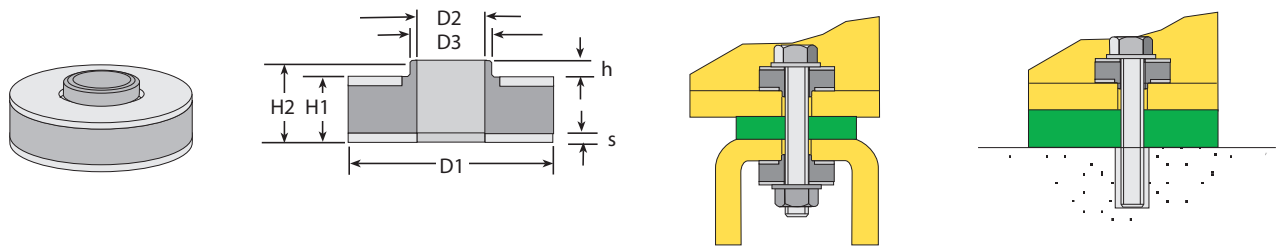

Isowasher AWRP Farrat Code	Rubber Ihrd Sh.A	Dimensions mm						
		D1	D2	D3	H1	H2	h	s
AWRP 10	80	30	10.5	14	14	17	3	2
AWRP 12	80	40	12.5	16	14	17	3	2
AWRP 14	80	50	14.5	18	16	19	3	2
AWRP 16	80	50	16.5	20	16	20	4	2
AWRP 20	80	60	20.5	24.5	21	25	4	3
AWRP 24	80	65	24.5	29.5	21	26	5	3

Stock Availability (subject to change)

- 1) Generally ex stock
- 2) 2-3 days
- 3) Subject to quotation

Order Examples: AWR 16  
AWRP 16

AWR and AWRP Characteristics Farrat Code	Spring constant kN/mm	Max. Load kN	Deflection at Max. load mm	Max. Torque Nm	Stock
AWR/P 10	1.25	1.90	1.5	3	3
AWR/P 12	2.40	3.60	1.5	8	3
AWR/P 14	2.70	4.90	1.8	12	3
AWR/P 16	3.00	5.40	1.8	16	3
AWR/P 20	3.60	8.50	2.3	37	3
AWR/P 24	3.90	9.00	2.3	44	3