


For machine and equipment with loads of up to 850 daN per mount

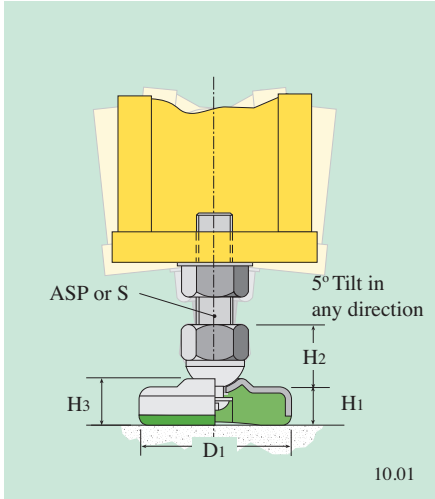

Farrat MF


Machine feet with oil resistant nitrile rubber pad bonded to steel cover. Excellent vibration damping and high friction grip. The swivelling adjusting screw tilts up to 5° in any direction.

Typical applications;

Special purpose machines, Automation equipment, Conveyors, Lightweight machine tools, Weighing machines, Food, drink and pharmaceutical machines and equipment, Chemical plant, Process & Packaging machines.

MFP Bright zinc plated mild steel

MFS Stainless Steel for food drink & chemical industries

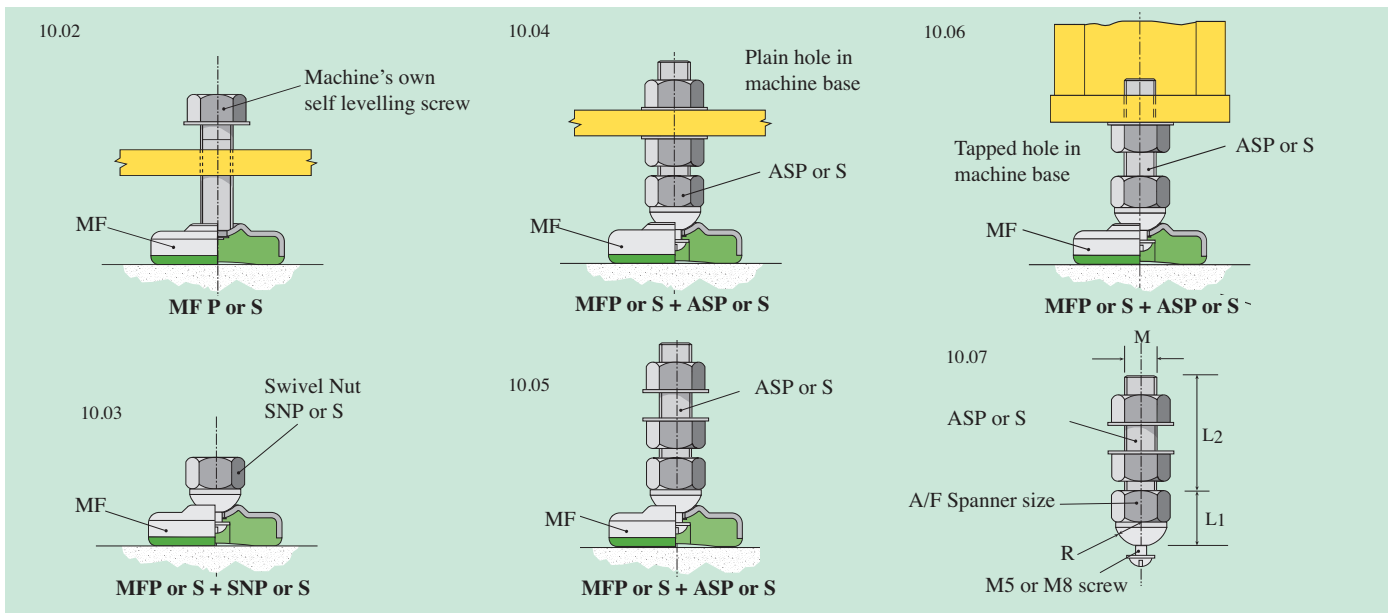

MF Bases Bright Zinc Plated Mild Steel MFP				
Base Model	Max Load daN	Dimensions mm		
		D1	H1	H3
MFP- 5E	300	50	14	17
MFP- 8E	600	80	14	21
MFP-10E	850	100	14	24

MF Bases Stainless Steel 304 MFS				
Base Model	Max Load daN	Dimensions mm		
		D1	H1	H3
MFS- 5E	300	50	15	17
MFS- 8E	600	80	16	21
MFS -10E	850	100	18	24

Swivel Nuts Zinc plated mild steel SNP Stainless Steel 304 SNS					
Dimensions mm					
Model	A/F	M	R	L1	Thread
SNP or S 10 x 1.5	17	10 x 1.50	11	20	M5
SNP or S 12 x 1.75	19	12 x 1.75	11	21	M5
SNP or S 16 x 2	24	12 x 1.75	11	24	M5
SNP or S 20 x 2.5	30	16 x 2.00	11	28	M5
SNP or S 20 x 2.5	30	16 x 2.00	11	28	M8
SNP or S 24 x 3	30	20 x 2.50	11	28	M5
SNP or S 24 x 3	30	20 x 2.50	11	28	M8

Order example: Base with swivel nut: e.g. MFP-5E+SNP 12 x 1.75 M5; MFS-8E+SNS 20 x 2.5 M8

Adjusting Screws Bright Zinc Plated Mild Steel					
Model	Dimensions mm				
	A/F	M	R	L1	L2
ASP 10 x 100	17	10 x 1.50	11	20	90
ASP 12 x 100	19	12 x 1.75	11	21	90
ASP 12 x 150	19	12 x 1.75	11	21	140
ASP 16 x 100	24	16 x 2.00	11	24	90
ASP 16 x 150	24	16 x 2.00	11	24	140
ASP 20 x 100	30	20 x 2.50	11	28	90
ASP 20 x 150	30	20 x 2.50	11	28	140

Adjusting screws with 2 Hex. Nuts, 2 Washers
Order example: Base with screw **MFP-5E+ASP-12x1.75x100**

Adjusting Screws Stainless Steel 304/15 (S)					
Model	Dimensions mm				
	A/F	M	R	L1	L2
ASS 10 x 100	17	10 x 1.50	11	20	90
ASS 12 x 100	19	12 x 1.75	11	21	90
ASS 12 x 150	19	12 x 1.75	11	21	140
ASS 16 x 100	24	16 x 2.00	11	24	90
ASS 16 x 150	24	16 x 2.00	11	24	140
ASS 20 x 100	30	20 x 2.50	11	28	90
ASS 20 x 150	30	20 x 2.50	11	28	140

Adjusting screws with 2 Hex. Nuts, 2 Washers
Order example: Base with screw **MFS-5E+ASS-12x1.75x100**

1 daN = 1kg