

# DATA SHEET



## WEDGEMOUNTS

Type	Bolt-On
Part No.	1WL-B-3S-H
Color	Green
Other colors upon request.	
Surface treatment	Painted

### Technical Data

Max. load [Kg]	7000
Max. load [kN]	68.7
Leveling distance per turn [mm]	0.30
Temperature range from [°C]	-15
Temperature range to [°C]	120
Mass [kg]	5.3

### Dimensions

Length l [mm]	150
Width b [mm]	150
Mid Height h [mm]	48
Adjustment Height, n (+/-) [mm]	6
Width across flats External [mm]	19
Width across flats Internal [mm]	10
Hole Diameter, c [mm]	M20
Hole Centre, d [mm]	60
Hole Centre, e [mm]	24

### Pad Details


	TOP PAD	BOTTOM PAD
Pad Grade	-	SG2P2
Pad thickness unloaded [mm]	-	2
Coefficient of friction on concrete	-	0.85
Hardness [° Shore A]	-	90
Bottom pad area A1 [cm <sup>2</sup> ]	225	225

### Options


Bolts	SN M20x2.5x100
Spheri-seat	SPS-150
AV Washer	AWR20

### PART REFERENCE

### Dimensions

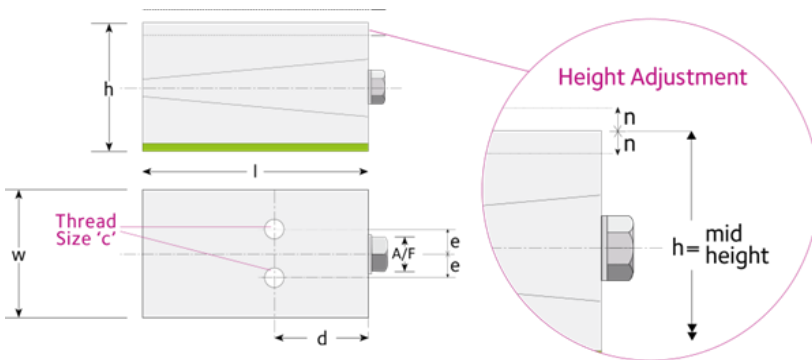

### Mounting Sketch

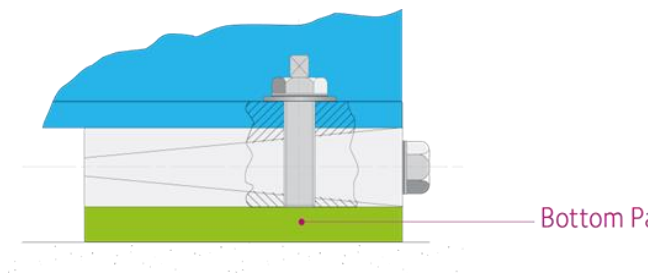

### Type Illustration



Farrat Isolevel Ltd Balmoral Road, Altrincham, Cheshire, WA15 8HJ, England, UK  
 T. +44 (0) 161 924 1600 F. +44 (0) 161 924 1616  
 E. sales@farrat.com www.farrat.com